



COOLING CLIMATE DEVICES AT JADE METEO PARK

Posted on November 4, 2015 by Urban UrbanNext




Categories: [Energy and sustainability](#), [High Density](#), [Philippe Rahm](#), [Project](#), [Senseable Technologies](#), [Technology and fabrication](#), [Thermodynamic Interactions](#)

Tags: [Climate](#), [Climate regulation](#), [Cooling climate device](#), [Devices](#), [Energetic Approach](#), [Energy](#), [Facilities](#), [Heat transfer](#), [Project](#), [Public Space](#), [Responsive Environment](#), [Thermodynamic practices](#), [Thermodynamics](#)

urbanNext Lexicon

The natural cooling devices are trees with specific qualities for cooling the atmosphere because they have a lots of leaves or big leaves that create heavy shadows, or white flowers and waxy white leaves in order to reflect the warm sun rays, or trees that produce a strong evaporation with consequence to cool the air around because of the physical change of phase from liquid to gas. The artificial cooling devices are apparatus working on meteorological phenomena like convection, conduction, evaporation or reflection in order to cool the air or directly the human body. The convective cooling devices are named "Anticyclone" or "Underground breeze" and they blow cool air chilled by underground heat exchange. The conductive cooling devices are named "Night light" or "Vertical night" and expose black and cold surface chilled by cold water where the human skin can be cooled by touching them. The evaporating cooling devices are named for example "Stratus cloud" or "Blue sky drizzle" and by emitting mist or rain, they refresh the surrounding air temperature by their change of phase from liquid to gas. The reflective cooling devices named "Moon light" or "Long waves filters" are apparatus that filter or reflect the sunlight and the hat carried by it.

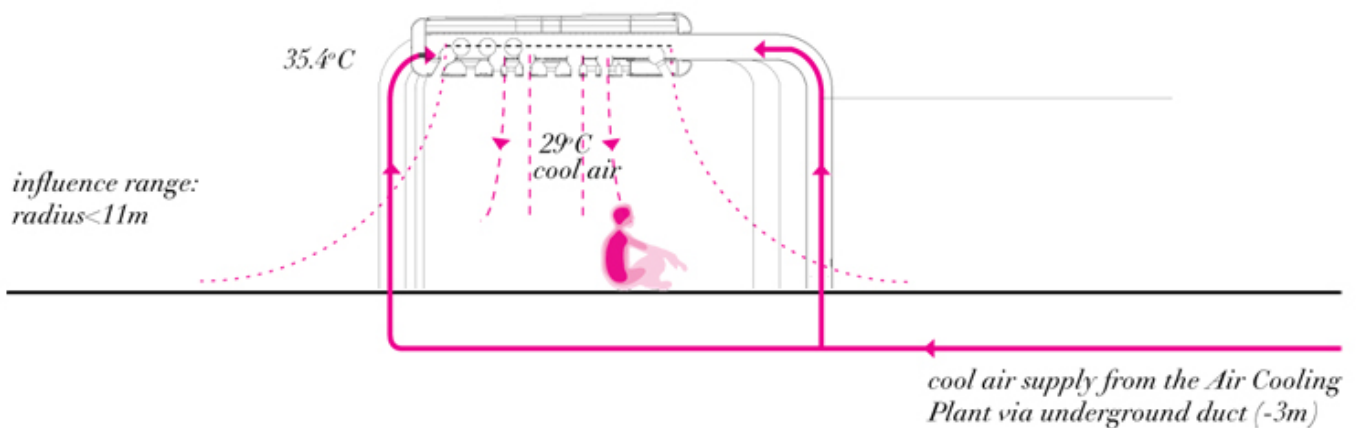


The **Anticyclone** device cools its surroundings during warm weather by blowing chilled air downward in order to help prevent Park patrons from overheating. To do so, the device utilizes two natural cooling phenomena: conduction and convection. Cool air brushing against the body causes human skin to transfer heat to the air, through conduction, thereby cooling itself. When the body is too hot, the brain signals blood vessels to vasodilate, causing them to expand in diameter. Because blood carries heat, more blood flowing to the skin's surface increases contact between the cool air and warm blood. This process speeds up the convective transfer of heat from the skin to the air,

urbanNext Lexicon

further cooling the body's internal temperature.


1. conduction

heat transfer from the hot skin to the cooler air through direct contact

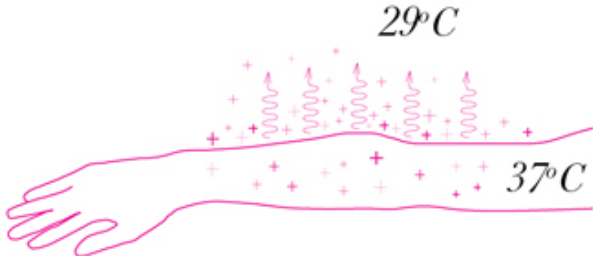


2. convection

breeze facilitates convective heat loss from the skin

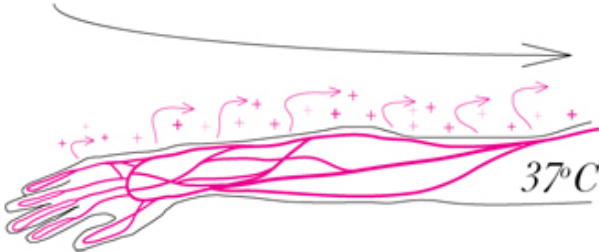

urbanNext Lexicon


Cooling Climate Devices at Jade Meteo Park
<https://urbannext.net/cooling-climate-devices-at-jade-meteo-park/>

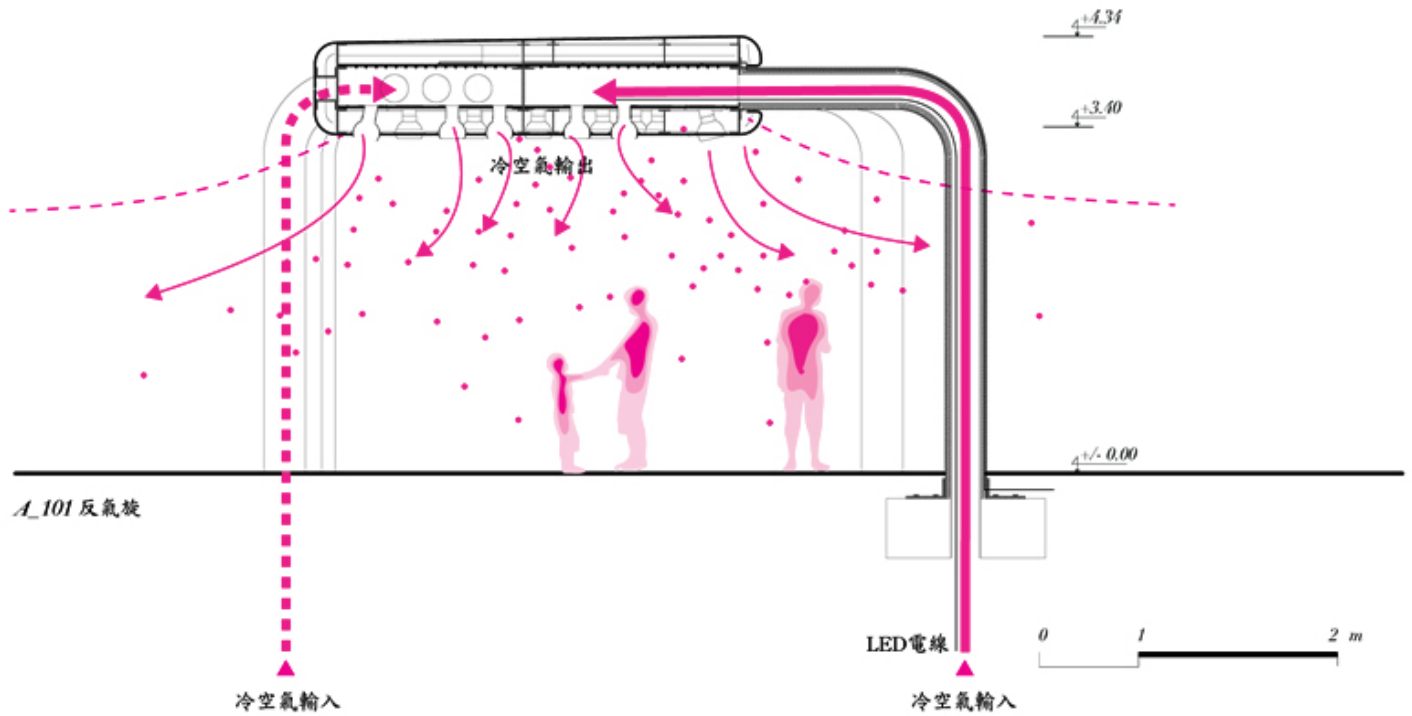


Principle Cool air blowing over skin also induces a convective heat exchange at the skin's surface. Convection is a process of losing heat through the movement of air or water molecules over the skin. This causes the cool air from the device to displace and replace the heat at the skin's surface.

urbanNext Lexicon


Cooling Climate Devices at Jade Meteo Park
<https://urbannext.net/cooling-climate-devices-at-jade-meteo-park/>




透視圖
axonometric view

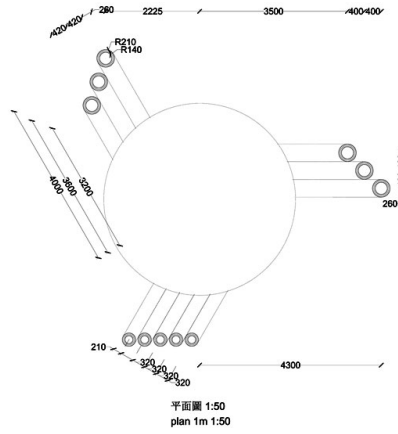


平面圖 1:50
plan 1m 1:50




平面圖 1:50
top view 1:50

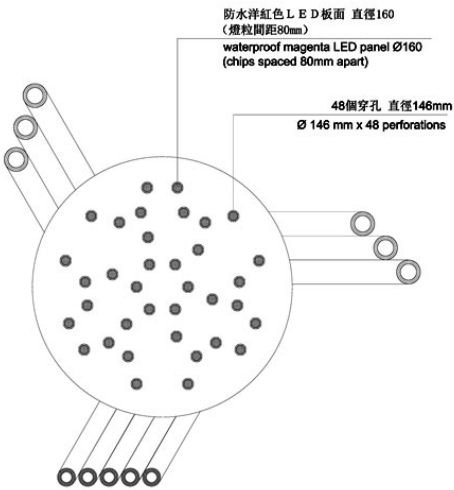

頂部平面圖 1:50
reflected ceiling plan 1:50

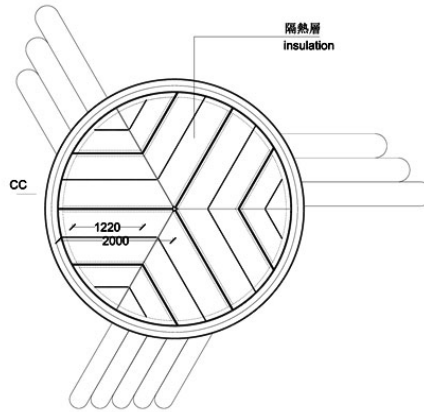

結構平面圖 1:50
structural frame plan AA 1:50

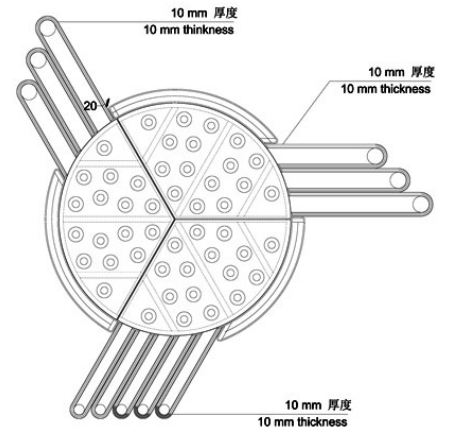


結構平面圖 1:50
structural frame plan 1:50


ISSN : 2575-5374

urbanNext Lexicon

Cooling Climate Devices at Jade Meteo Park
<https://urbannext.net/cooling-climate-devices-at-jade-meteo-park/>

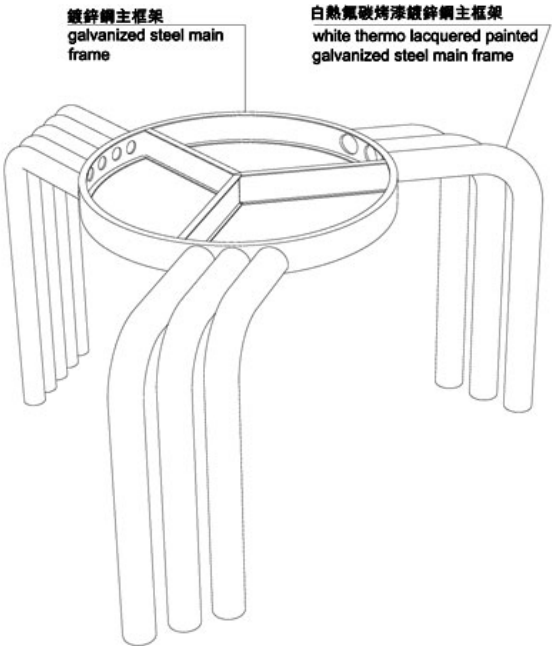

透視圖
structural axonometric view

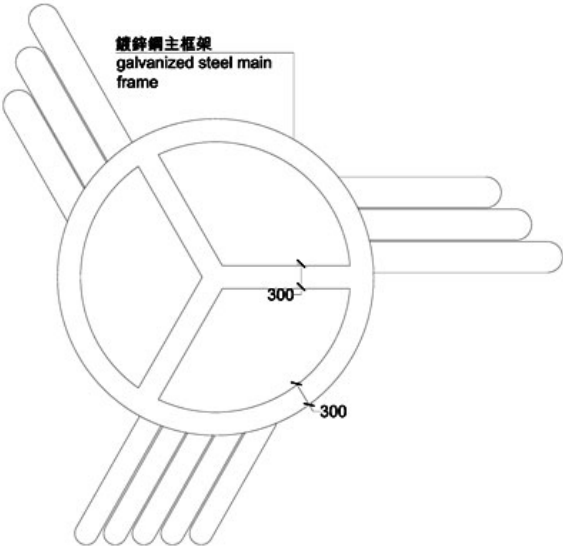

結構平面圖 1:50
structural frame plan 1:50

urbanNext Lexicon

Cooling Climate Devices at Jade Meteo Park

<https://urbannext.net/cooling-climate-devices-at-jade-meteo-park/>


白熱氣碳烤漆3mm鋁板

white thermo lacquered painted 3mm aluminium




鍍鋅鋼副結構 (440x300x11x18 mm)

galvanized steel substructure (440 x 300 x 11 x 18 mm)



鋁板

aluminium sheet



防水洋紅色LED板面 直徑160


(燈粒間距80mm)

waterproof magenta LED panels
Ø160 (chips spaced 80mm apart)



鍍鋅鋼主框架

galvanized steel main
frame

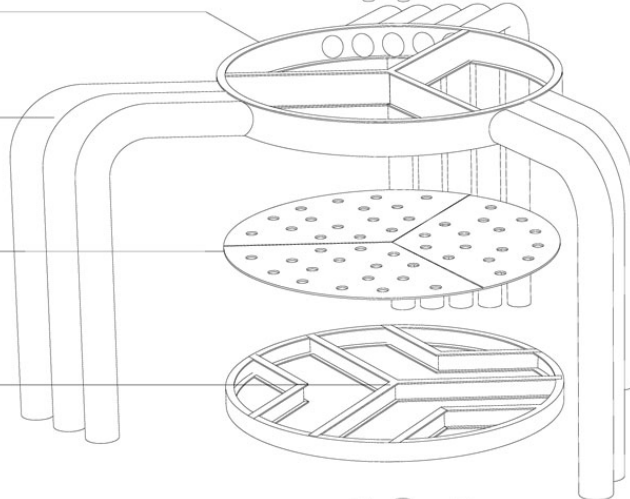


白熱氣碳烤漆鍍鋅鋼主框架

white thermo lacquered painted
galvanized steel main frame


穿孔鋁板

perforated aluminium sheet



鍍鋅鋼副結構

galvanized steel substructure




噴流風口 (CL-A 250mm)

jet nozzle (CL-A ball type jet diffuser: size 250 mm)



白熱氣碳烤漆3mm鋁板

white thermo lacquered painted 3mm aluminium




透視圖
axonometric view

ISSN : 2575-5374

urbanNext Lexicon

Cooling Climate Devices at Jade Meteo Park
<https://urbannext.net/cooling-climate-devices-at-jade-meteo-park/>

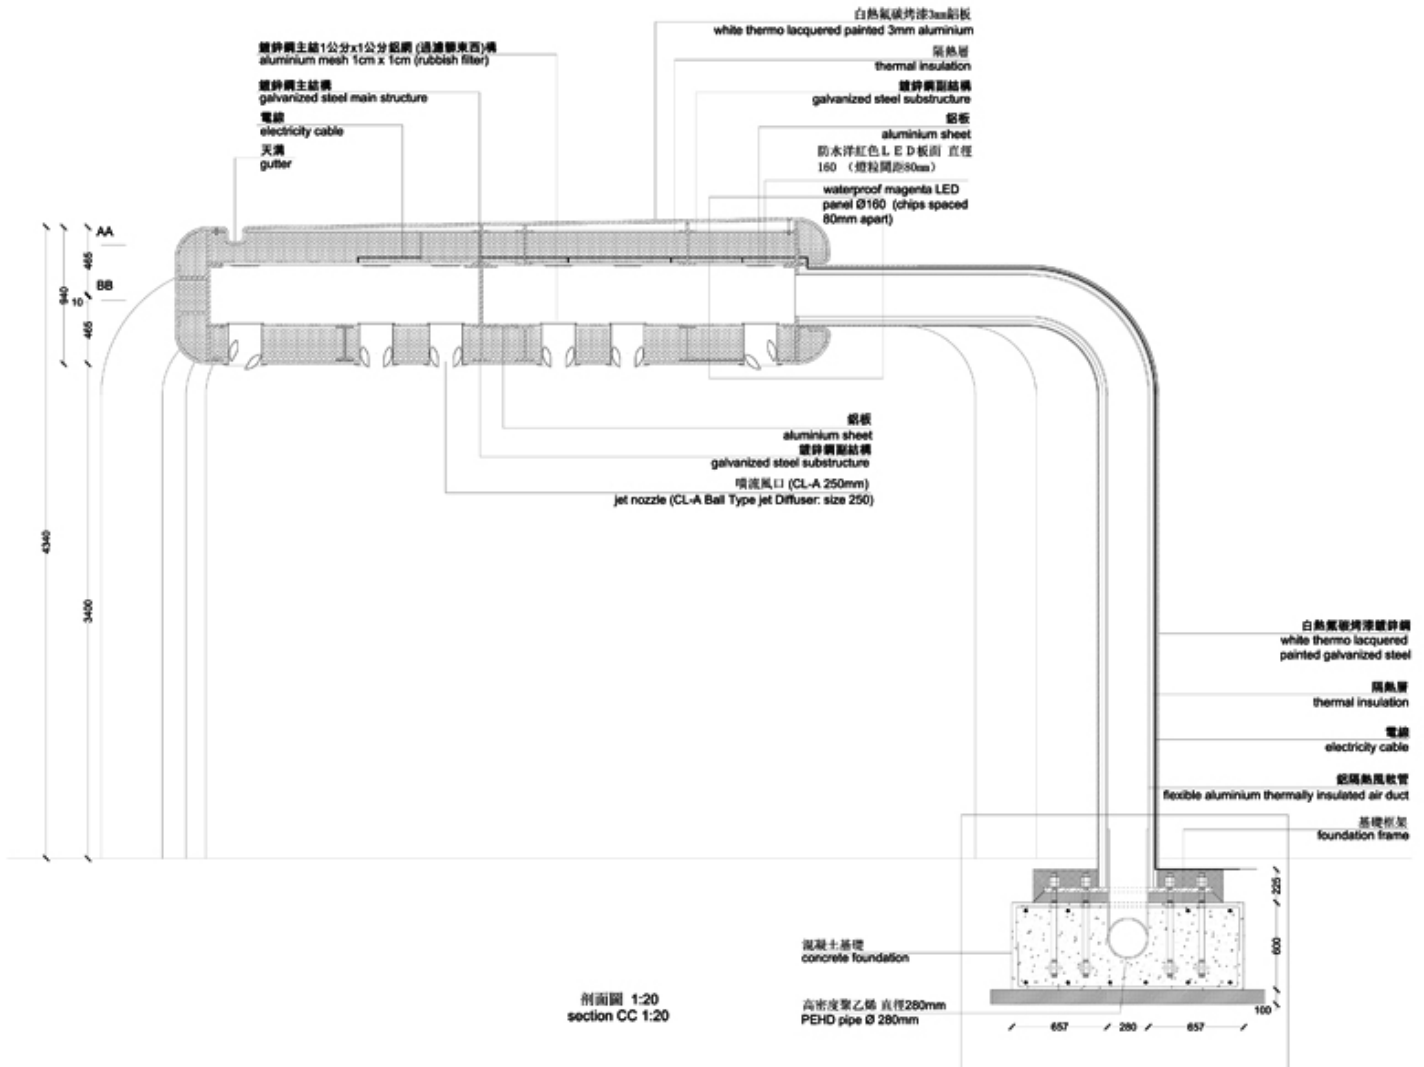

Convective heat transfer is given by $q = hc.A.dT$, where: q = heat transferred per unit time (W), A = heat transfer area of the surface (m^2), hc = convective heat transfer coefficient of the process ($W/m^2 \cdot ^\circ C$), dT = temperature difference between the surface and the bulk fluid ($^\circ C$). On the 15th June 1pm, the average convective heat transfer from air that is $35.4^\circ C$ to $29^\circ C$ chilled air blown from the device is approximately $27,91W$.

Extract from coming soon



ISSN : 2575-5374

urbanNext Lexicon

Cooling Climate Devices at Jade Meteo Park
<https://urbannext.net/cooling-climate-devices-at-jade-meteo-park/>